

HERONLUX SE



ITEM DESCRIPTION

Slim surface mounted downlight luminaire for professional lighting. Due to its versatility, HeronLux luminaires are perfect to illuminate such spaces as corridors, shopping centers, hallways and etc.

ENVIRONMENT

- Offices
- Hallways
- Shopping malls
- Technical rooms
- Common rooms
- Showrooms


FEATURES & BENEFITS

- Easy installation
- 7 years warranty

GENERAL INFORMATION


SUPPLY VOLTAGE	210-230V; 50-60 Hz
POWER FACTOR	>0.9
EFFICACY	169 lm/W
CCT	4000 K (natural white)
CRI	>80
IP CLASS	IP40
APPLICATION HEIGHT	From 2.2 up to 4 meters
OPERATING TEMP.	-20 °C ~ +50 °C
STORAGE TEMP.	-5 °C ~ +50 °C
LIFETIME	L70B10 100 000 h (Ta 25°C)
INSTALLATION	recessed
CERTIFICATION	CE and RoHS compliant
WEIGHT	1.96 kg
WARRANTY	7 years

DIMENSIONS

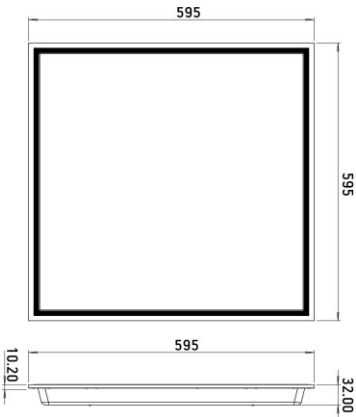

* Dimensions are in mm

LIGHT DISTRIBUTION GRAPH



ORDERING INFORMATION

SKU	DIFFUSER	BEAM ANGLE	POWER	LUMEN OUTPUT	CCT	DALI
BPAP-SE-6060A90840I20	diamond	90°	20 W	3370 lm	4000K	-
BPAP-SE-6060A90840I20-DA	diamond	90°	20 W	3370 lm	4000K	+